

Broadcast Power Xperience Design




PAFM150W

150W - BROADCAST FM POWER AMPLIFIER MODULE

Designed for FM radio transposers and transmitters, this amplifier incorporates MOSFET transistors to enhance ruggedness and reliability.

General characteristics:

- 87.5 - 108.0 MHz.
- 48 Volts.
- Internal Bias
- Input/Output 50 Ω .
- Pout : 150 W NOMINAL, 275 W max.
- Gain : 17 dB typical, 23dB Max.
- Class A, AB, B or C (ajustable)
- Devices: MRF151 or equivalent.
- ROHS Compliant.

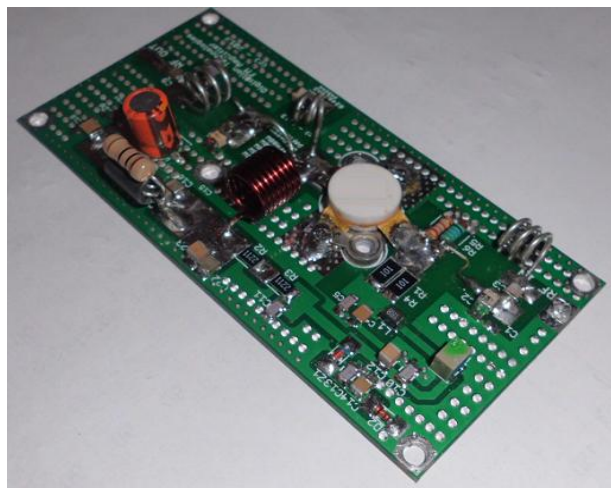


Dimensions (L x W x H): 102 x 50 x 32mm (4" x 2" x 1.25")

This picture is a mere example, it does not bind the provided product

ABSOLUTE MAXIMUM RATINGS (Heatsink Temperature = 50 °C)

SYMBOL	PARAMETER	VALUE	UNIT
Vs	Drain Voltage Supply	50	V
Is	Supply Current	8	A
VSWR	Load Mismatch (all phase angles, T-heatsink =40°C, Id=9A)	3:1	-
Tstg	Storage Temperature Range	-30 to +100	°C
T-heatsink	Operating Temperature	-20 to +70	°C

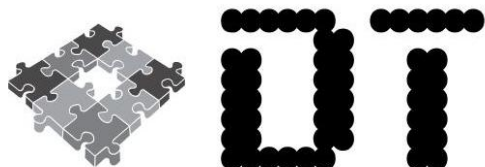

Broadcast Power Xperience Design




PAFM150W

150W - BROADCAST FM POWER AMPLIFIER MODULE

ELECTRICAL SPECIFICATIONS (T-heatsink = 50 °C, 50Ω loaded, Vs = 48 V)


CHARACTERISTICS	MIN.	TYP.	MAX.	UNIT
Operating Frequency Range	87.5		108.0	Mhz
RF Output Power (RFOUT)	0	150	275	W
RF Power Input (RFIN)	0	2	4	W
Power Gain (150W output)	14	17	23	dB
Power Supply Module (Vs)	42	48	50	V
Mosfet Gate Current (Igs)	50	100	150	mA
Current (+48V)	-	4,5	7	A
Collector Efficiency (Load 50Ω)	61	70	78	%
Input VSWR	1.1:1	1.3:1	1.5:1	
F2 Second Harmonic (without L.P.F.)	-22	-33	-38	dBc
F3 Third Harmonic (without L.P.F.)	-16	-19	-28	dBc

CONNECTIONS

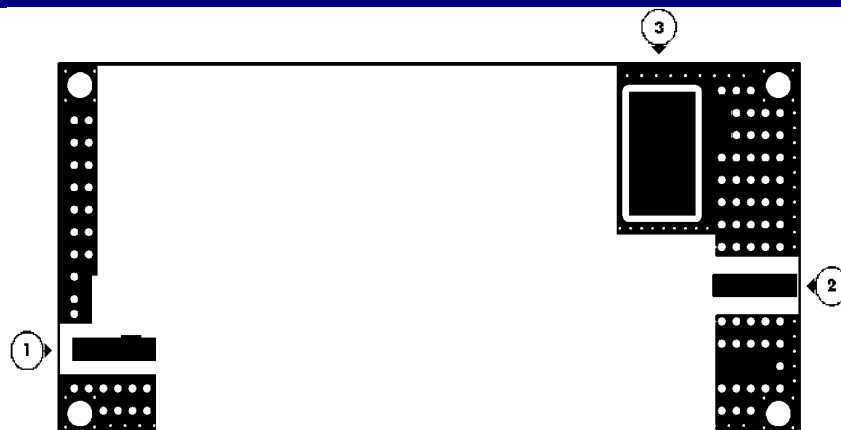

- 1. RF Input (0-5W).** You connect 50 ohm coaxial cable (RG316 or RG178 type) in this connection.
- 2. RF Output (0-150W).** You connect 50 ohm coaxial cable (RG303, RG400 or RG142 type) in this connection.
- 3. +48V input power supply connection Vs.** Connect to you +48V power supply. +48V/5A min. RECOMMENDED.

Note: You connect GND to a M3 screw board or aluminium heatsink.

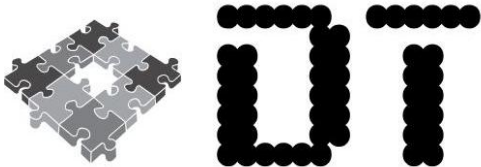


Broadcast Power Xperience Design



PAFM150W


150W - BROADCAST FM POWER AMPLIFIER MODULE

AIR FLOW DETAIL

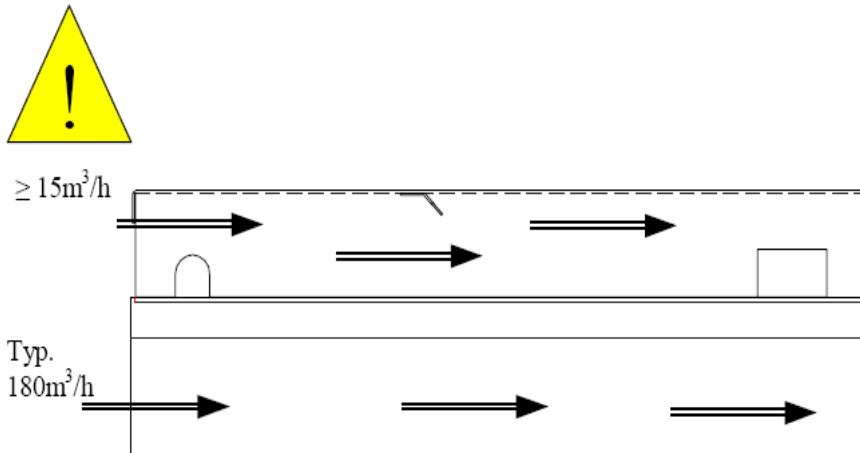


- Is very important you install 1 or 2 fans in FM amplifier.

MECHANICAL

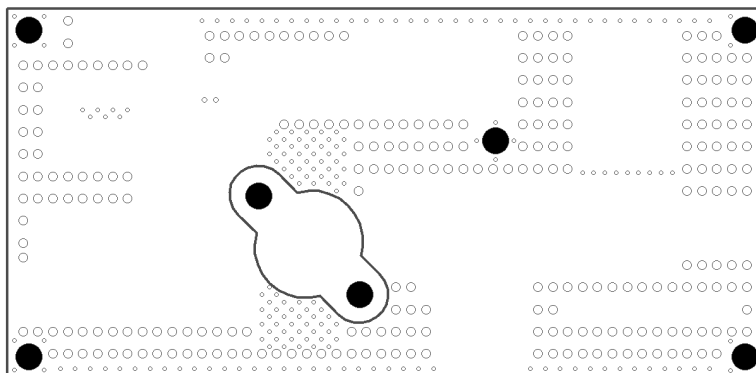

- Use M3 screws in point marked.(Black points)
- Use special paste silicone of RF semiconductors in RF Power Mosfet Transistors. RF Power Mosfet can to die if you use bad paste silicone.
- Use aluminium heatsink, minimum size: 150mm (10.4") x 100mm (4") recommended.

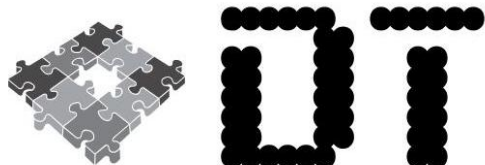

Broadcast Power Xperience Design



PAFM150W

150W - BROADCAST FM POWER AMPLIFIER MODULE

Digit@lion Technologies reserves the right to make changes without further notice to any products herein. Digit@lion Technologies makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Digit@lion Technologies assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Digit@lion Technologies does not convey any license under its patent rights nor the rights of others. Digit@lion Technologies products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Digit@lion Technologies product could create a situation where personal injury or death may occur. Should Buyer purchase or use Digit@lion Technologies products for any such unintended or unauthorized application, Buyer shall indemnify and hold Digit@lion Technologies and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Digit@lion Technologies was negligent regarding the design or manufacture of the part.

Digit@lion Technologies and are registered trademarks of Digitalion Technologies.

WARRANTY

All OEM modules have 1 year warranty in Digit@lion Technologies.

The warranty not include the RF power transistor installed.

Shipping Cost to our laboratory and back for a repair is not included in the warranty.

This product is manufactured by Digitalion Technologies. Made in Spain.

For more information of others products you send e-mail to: support@digitaliontechnologies.com